


ABSORPTION PANELS

slotted wood veneer panels



- reduces unwanted reflections and echos •
- used in auditoria, listening rooms, home theaters, theaters •
- noise reduction coefficient (NRC's) range from 0.5 to 0.85 •
 - compliments our range of acoustic products •
 - acoustic panels fitted to either walls or ceilings •

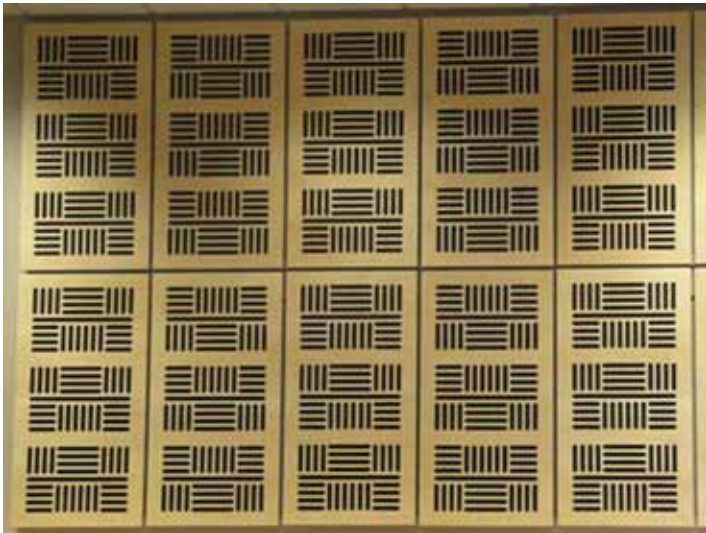



natural wood veneer finishes include
crown mahogany veneer
maple veneer
cherrywood veneer
beech veneer
white oak veneer
rosewood veneer

• can be intergrated into Aluglass Bautech Variflex® system •



SPECIFICATION TEXTS AVAILABLE ON AUTOSPEC AND OUR WEBSITE



TEL: +27 11 451 8400

FAX: +27 11 609 8097

mailbox@aluglass.co.za

www.aluglass.co.za